



COMMERCIAL PRODUCTS™

Tractor Mount


TMVH02/PTO
Vertical/Horizontal
Log Splitter



Tractor Mount Vertical/Horizontal Log Splitters

These commercial grade tractor mounted log splitters are designed for tough applications in both vertical and horizontal positions. An attractive powder coated finish provides the finest protection available, and Iron & Oak's rigid quality control and component testing help ensure years of productive, reliable service. Since 1982, the name Iron & Oak has stood for quality and reliability when it comes to log splitters and wood processing products.

Quality Standard Features

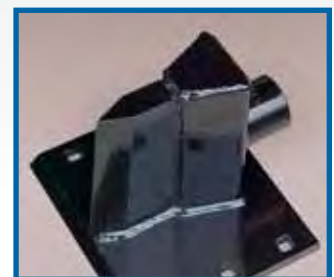


Superwedge – Spreads the log while splitting


TMVH03/HYD
Vertical/Horizontal
Log Splitter



Shown in horizontal carry position

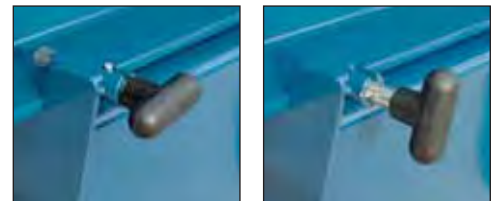

Quick release handle for easy change from horizontal to vertical splitting positions.



TMVH02/PTO & TMVH03/HYD Vertical/Horizontal Log Splitters



Iron & Oak – the finest commercial grade log splitter on the market today!

- Rugged, heavy-duty construction for years of exceptional service
- Ergonomic design for use in vertical and horizontal operating positions
- Rigid quality control during manufacturing ensures greater reliability
- Factory testing of all major components
- Powder coated finish for the best appearance and weather protection
- Year-round manufacturing, parts, and support

MECHANICAL SPECIFICATIONS

Tractor Hitch Categories	1, 2, & 3
Beam	6 inch rail
Wedge	6 inch high carbon steel
Cylinder Stroke	24 inches
Cylinder Size	4" x 24" clevis type cylinder, 1.75" rod
Safety Release Control Valve	Detent, auto return
Log Opening	24.5 inch maximum
Operating Positions	Vertical/Horizontal
Pin Width	36 inches
Splitting Height (horiz. position)	30 inches
Shipping Weight	
TMVH02/PTO	585 lbs.
TMVH03/HYD	515 lbs.

TRACTOR HYDRAULIC SPECIFICATIONS for Model TMVH02/PTO

Hydraulic Oil	
Above 30° F	Use AW-32, 10W (non foaming) or ATF Dextron III
Below 30° F	Use only ATF Dextron III
Hydraulic Tank Capacity	7.2 gallon
Hydraulic System	9.5 gallon capacity (includes tank, cylinder, filter, hoses)

PTO SPECIFICATIONS

Force	20 ton splitting force
Gear Pump (PTO)	Single-stage, 10 GPM

TRACTOR HYDRAULIC SPECIFICATIONS for Model TVH03HYD

Force	20 ton splitting force with tractor pressure of 3,000 psi
	12.5 ton splitting force with tractor pressure of 2,000 psi
	9 ton splitting force with tractor pressure of 1,500 psi

Cover photos may deviate slightly from actual units. Materials and specifications subject to change without notice.



Iron & Oak Commercial Products

410 W. Broadway Ave.

P.O. Box 577

Streator, Illinois 61364-0577

Phone: 815-672-8596 • Fax: 815-672-9073

E-mail: sales@logsplitters-ironoak.com

Web Site: www.logsplitters-ironoak.com